


GVA 3800

COMPACT DEEP WATER DRILLING SEMI-SUBMERSIBLE

GVA 3800

Operation area	Moderate environment
Operation water depth	1,500 m (5000 ft), DP Mode
Drilling depth	Up to 7,620 meter (25,000 ft)
Regulations	IMO MODU Code 2001, IMO DP Class 3
Classification	DNV, ABS or Lloyd's
Accommodation	120 persons

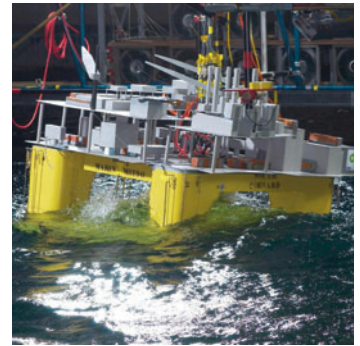

Features:

- Variable deck load capacity 5000 mt in operational and survival conditions
- Safe design with optimal strength, stability and intact stability
- Low operation and maintenance costs
- Large deck area for storage of cargo

MAIN PARTICULARS

Length over all:	112.8 m	370.1 ft
Width over all:	79.4 m	260.5 ft
Width outside pontoons:	65.6 m	215.2 ft
Length of pontoons:	81.6 m	267.7 ft
Height of pontoons:	8.4 m	27.6 ft
Height to Main Deck:	35.5 m	116.5 ft
Height of deck box:	7.5 m	24.6 ft
Four columns:	12.0 x 12.5 m	39.3 x 41.0 ft
Transit draught:	8.1 m	26.3 ft
Transit displacement:	20,600 mt	22,700 st
Transit deck & column P.load:	5,000 mt	4,190 st
Operation draught:	20.0 m	65.6 ft
Operation displacement:	30,000 mt	33,070 st
Operation deck & column P.load:	5,000 mt	4,960 st
Survival draught:	16.0 m	52.5 ft
Air gap in survival:	12.0 m	39.4 ft

MAIN MARINE SYSTEMS/EQUIPMENT

Power generation:	8 x 3,500 kW	8 x 4,700 HP
Thrusters:	4 x 4,500 kW	4 x 6,030 HP
Thruster control:	DP 3	
Mooring system:	8 point mooring system	
Main deck cranes:	2 x 60 mt	2 x 66 st

MAIN DRILLING SYSTEMS/EQUIPMENT

Derrick for up to 124 ft stands:	680 s.tons	750 st
Top drive:	680 mt	750 st
Drawworks	680 mt	750 st
Riser tensioners, wireline type:	580 mt	640 st
Drilling riser, 75 ft joints:	2,000 kips flange rating	
Mud pumps:	3 x 1,200 kW	3 x 1,600 HP
BOP Stack:	15 000 psi, 5 rams	

TANK/STORAGE CAPACITIES

Fuel oil:	2,580 m ³	16,225 bbls
Drill water:	1,390 m ³	8,742 bbls
Potable water:	340 m ³	2,138 bbls
Mud storage, col+pont:	600 m ³	3,773 bbls
Mud pits:	600 m ³	3,773 bbls
Brine:	630 m ³	3,962 bbls
Base oil:	615 m ³	3,868 bbls
Bulk mud:	480 m ³	3,019 bbls
Bulk cement:	480 m ³	3,019 bbls
Sack storage:	150 m ²	1,615 sqft

Mailing address & Reg. office

GVA Consultants AB
P O Box 11450
SE-404 29 Gothenburg, Sweden

GVA North America
Sales Office, Houston

GVA Consultants AB
Sales Office, Brazil

Visiting address

Östra Hamngatan 7
41110 Gothenburg

1080 Eldridge Parkway
Houston, TX 77077
USA

Avenida Presidente Wilson 231, 5th floor
20030-021 Rio de Janeiro- RJ
Brazil

Telephone

Nat. 031-10 67 00
Int. +46 3110 67 00

Phone. +1-281 529 2100
Fax. +1-281 529 2525

Phone: +55 21 2103 7608

E-mail

gva@gvac.se

Website

www.gvac.se